



Compact lifting tower specially designed for easy transportation when folded. It has been certified to lift loads of up to 125 kg to a maximum height of 5.00 metres



SPECIFICATIONS ELC-735

► Maximum Height:	5,00 m
► Maximum Load:	125 kg
► Safety System:	ASB System (Automatic Safety Blocking System)
► Brake Winch:	Manual Winch (450 kg)
► Height Stowed:	Height: 1,45 m - Base: 38 x 30 cm
► Working area:	Ø 210 cm
► Material:	Steel
► Wheels:	2xØ100 mm for wheelbarrow style transport.

► Adaptors:
► Net Weight:
► Complies with Standards:

With male terminal Ø35mm
46 kg




EN 17206 (Replaces DIN 56950-1)
DGUV 17 & 18
DGUV Rule 115-002 (Formerly BGV-C1)
2006/42/CE



SAFETY

Equipped with two safety systems

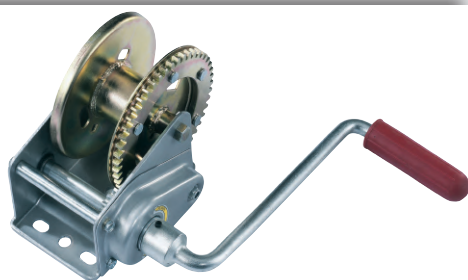

Manual winch with automatic braking system (450 Kg)



Compliant with
EU Machinery Directives


ASB SYSTEM



ASB System: Automatic Safety Blocking System

Zip/Trigger safety system with safety bolts

TELESCOPIC SECTIONS

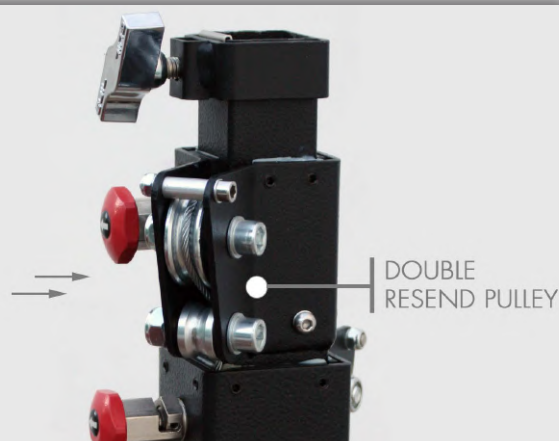

The four sections are raised by means of a $\varnothing 4$ mm non-rotating steel wire rope, which is guided by self-lubricating pulleys with bearings.

BASE SECTION WITH WHEELS ($\varnothing 100$)



The compact base is provided with two heavy-duty castors ($\varnothing 100$ mm). with four detachable stabiliser legs provided with leveller screw jacks that have reinforced spin handles with double thread and speed which makes the levelling task easier, Their non-slip foot plates ensure a perfect adjustment of the tower to the floor surface.

TRANSPORT



It has a compact and lightweight design for easy handling, transportation and storage and can fit in small vehicles for maximum manoeuvrability.

ADAPTORS

Compatible with crossbar: **BR-12**



ADT-41



ADT-01



ADT-44



ADT-30

ADT-22



ADT-16

