



GUIL®

Since 1983

TELESCOPIC LIFTING TOWERS

ELC-765



Telescopic lifting tower designed and certified to lift loads of up to **230 kg (507 lb)** to a maximum height of **5.22 m (17 ft)**.



SPECIFICATIONS ELC-765

- ▶ Maximum height: **5.22 m | 17 ft**
- ▶ Maximum Load: **230 kg | 507 lb**
- ▶ Safety System: **ASB System (Automatic Safety Blocking System)**
- ▶ Brake Winch: **AL-KO 900 (900 kg)**
- ▶ Footprint: **Ø 225 cm | 7 ft 4.6 in**
- ▶ Folded Dimensions: Height: **1.77 m | 5 ft 10 in**
Base: **45 x 45 cm | 1 ft 5.7 in x 1 ft 5.7 in**
- ▶ Wheels: **4 wheels with brakes and bearings**

Secured to the base with 4 fixing points

- ▶ Material: **Steel**
- ▶ Net Weight: **98 kg | 216 lb**
- ▶ Adaptors: **Ø 55 mm | Ø 0.18 ft**
- ▶ Complies with Standards:
 - EN 17206 (Replaces DIN 56950-1)
 - DGUV 17 & 18
 - DGUV Rule 115-002 (Formerly BGV-C1)
 - 2006/42/CE





SAFETY SYSTEMS

ELC-765 has two safety systems which ensure maximum reliability when raising or lowering loads.

1.- Automatic brake winch AL-KO 900 (900 kg) from the Austrian factory AL-KO: Its auto-block system ensures the load remains at the required height; once the required height is reached, the braking mechanism retains the load when the handle is released.

2.- ASB System (Automatic Safety Blocking System): A Rack-and-Bolt safety system with safety bolts. In the extreme case of cable breakage, the safety bolt would immediately engage with the rack, preventing the load from falling.



ELC-765 telescopic lifting towers comply with the safety requirements according to the following Standards and Regulations:

- **EN 17206** (Replaces **DIN 56950-1**): Entertainment technology - Machinery for stages and other production areas - Safety requirements and inspections.
- **DGUV 17 & 18, DGUV Rule 115-002** (Formerly **BGV-C1**):
 - **DGUV Regulations 17 & 18**: Accident prevention regulation. Event and production facilities for scenic presentation.
 - **DGUV Rule 115-002**: Staging and Production Facilities for the Entertainment Industry.
- **Directive 2006/42/CE** on machinery that establish "Essential health and safety requirements relating to the design and construction of machinery".

The ELC-765 lifting tower is manufactured with the most advanced welding equipment which guarantees the highest level of safety and strength, complying with the lightweight, sturdiness and manoeuvrability requirements needed to lift heavy loads.





GUIL®

Since 1983

TELESCOPIC LIFTING TOWERS

ELC-765




MAST SECTIONS

The lifting tower consists of 4 high-resistance steel profiles finished in special epoxy paint for outdoor use. Its finish allows the lifting tower to be set up outside, ensuring its good upkeep and durability.



The masts are equipped with:

- a) **Oversized welded reinforced ending** which strengthens the mast, with an ergonomic metal pressure knob.
- b) **Internal cushioning system** to prevent wobbling of the mast sections when extended (on all four sides).
- c) **Double drawback pulley**
- d) **Pulley protectors** which reduce the chance of damage to the pulleys during handling and transportation, at the same time preventing the cable from coming off the pulleys.

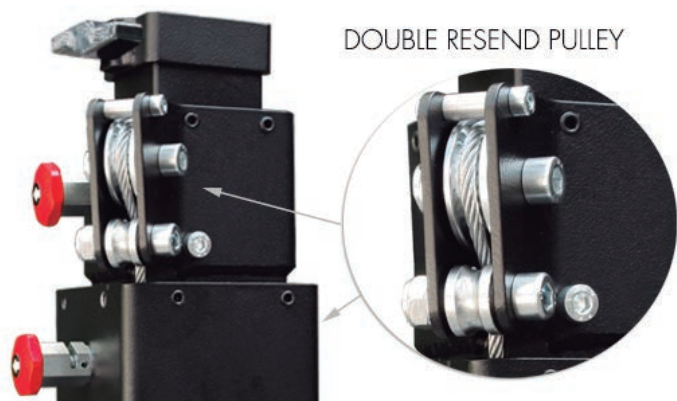

DOUBLE RESEND PULLEY





GUIL®

Since 1983


TELESCOPIC LIFTING TOWERS

ELC-765






BASE SECTION

The reinforced base of 45 x 45 cm is fitted with four rectangular legs equipped with levelling screw-jacks with non-slip chromed steel and injected rubber discs which guarantee a perfect grip on all kinds of surface.

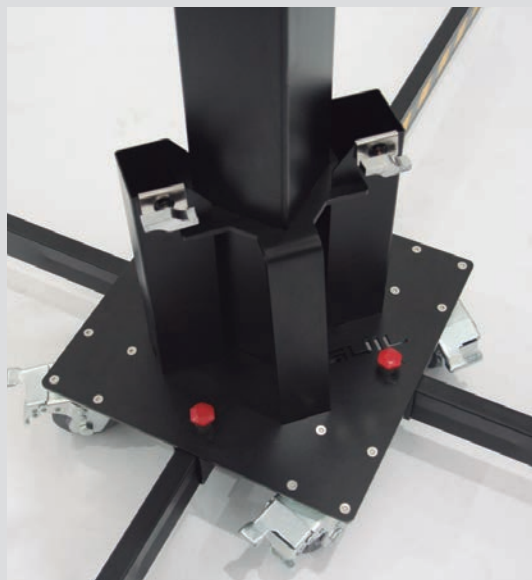

The base is provided with four swivel wheels with brake and bearings which permit the tower to be transported more smoothly and comfortably. The wheels are fastened to the base with fastening plates, with four screws per wheel; this system ensures the best possible fastening, even in jobs where the tower must be transported over irregular surfaces.

DIMENSIONS

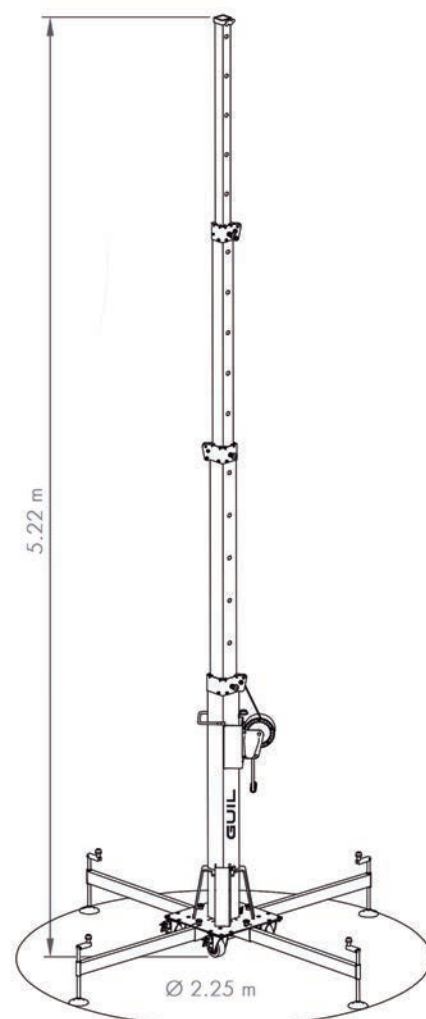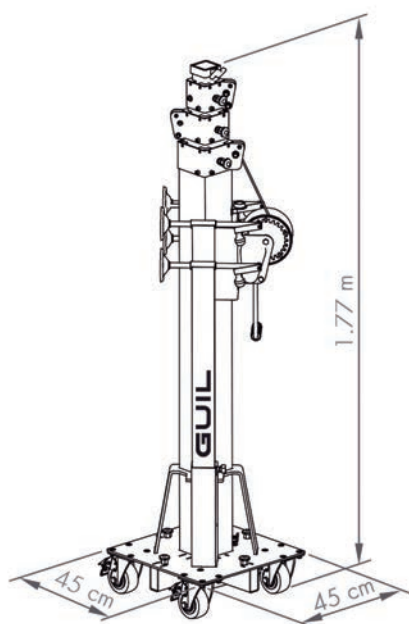



LIFTING PROCESS

For a quick, safe and effortless lifting process, ELC-765 telescopic towers are equipped with an Ref. **AL-KO 900** (900 Kg) hand winch with automatic braking system, which stops and holds the load at the desired height: once you have reached the desired height, on letting go of the winch handle the braking system automatically engages and holds the load in place.

The mast sections are extended by means of a set of pulleys with bearings and a **galvanised steel wire rope** with steel core (Composition: 7x19+0), specially manufactured for lifting heavy loads.



TRANSPORT

It has a compact design for easy handling, transportation and storage and is perfectly manageable by one technician, saving on time and increasing productivity.

Its base is provided with **four heavy-duty swivel castors** to make handling and transport an easy task.

The wheels are secured to the base using a metal plate **with 4 fixing points**; to guarantee a secure fix even when moving the tower on uneven ground.



ELC-765 towers come with a handle to help with handling.



During transport, the four legs are kept in the storage cassettes and secured there with a knob and plate to avoid marking them..



The tower is provided with a **spirit level** to allow it to be vertically

DECLARACIÓN CE DE CONFORMIDAD EC DECLARATION OF CONFORMITY



El fabricante:
The manufacturer:

GUIL®

GUIL Accesorios Música S.L.

P.I. La Creu C/ Ismael Tomás Alacreu, 28
46250 L'Alcúdia –Valencia – SPAIN

Declara que el modelo:
Declares that the model:

Torre de elevación telescópica / *Telescopic lifting tower*

Ref.	Carga Máx. / <i>Max. Weight</i>	Altura Máx. / <i>Max. Height</i>
ELC-765	230 kg	5.22 m

Cumple con los requerimientos de las siguientes normativas:
Complies with the requirements according to the following standards:

- **2006/42/CE**
- **EN 17206**
- **DGUV Regulations 17 and 18**
- **DGUV Rule 115-002**

La persona facultada para elaborar el expediente técnico es:
The qualified person to create the technical report is:

Salvador Gascó García
P.I. La Creu C/Ismael Tomás Alacreu, 28
46250 – L'Alcúdia, Valencia (SPAIN)

Este producto ha sido sometido a los controles de seguridad y pruebas de resistencia realizadas en la fábrica de producción.

This product has been submitted by the manufacturer to a factory production control and to the further testing of samples taken at the factory.

Firmado:
Signed:


P.I. LA CREU C/ ISMAEL TOMÁS ALACREU, 28
46250 L'ALCUDIA (VALENCIA) SPAIN
Tel. + 34 962996500 Fax. + 34 962540833
www.guil.es info@guil.es sales@guil.es

Fecha de emission:
Issued on: **09/01/2024**

Eduardo Hinarejos Chinchilla
(Director general / *General manager*)

El presente certificado es válido salvo suspensión o retirada notificada con tiempo.
This Certificate is valid unless it is cancelled or withdraw upon written notification.