



GUIL®

Since 1983

MATERIAL LIFTERS

COMPACT DESIGNS FOR EASY MANOEUVRABILITY

MAXIMUM SAFETY & DURABILITY

FOR OUTDOOR AND INDOOR USE

TIMESAVING > 100% PRODUCTIVITY

FAST AND EASY SET-UP

CHOOSE A MODEL AND
LIFT YOUR LOAD



www.guil-lifters.com
MADE IN SPAIN



GUIL® Engineering for Lifting Loads

GUIL is a Spanish manufacturer with over 35 years of experience in the metal industry, specialised in the design and production of IMaterial Lifting Towers for industrial use (for maintenance, installation and construction companies), which are characterised as being highly innovative, efficient and safe.

Our head office is located at our premises in L'Alcúdia, a town that is only 30 km from the region's capital, Valencia (Spain) with more than 5000 m2 for our design and project offices, our prototype and testing workshops, our factory and machinery areas (cutting, welding, painting, assembly etc.), quality control department, warehouse and packing departments, sales and marketing departments and our customer service department.

At the heart of our company is our technical team of engineers who are dedicated to developing lifting towers and wind-up stands of the highest quality and efficiency, and our sales and post-sale staff who offer a fast, competent and professional customer service.

We manufacture over 30 models of lifting towers with compact designs which offer the user a safe and practical option to lift many types of loads. Thanks to this wide range of models and their versatility for use in so many different tasks, along with our adaptors designed for functionality, our towers can be used in numerous fields and are well known for their high quality and durability.

Since 1983 GUIL has experienced fast and constant evolution and growth, quickly adapting to the ever changing market requirements and continuously improving our manufacturing systems. Thanks to our large distributor network over the 5 continents and our presence at the main national and international trade shows GUIL export just over 89% of their total production to over 90 countries worldwide.

Choose a model and Lift your load

GUIL manufactures Material lifters that offer:

- Maximum stability, safety and resistance. Maximum Safety & Durability
- Timesaving > 100% Productivity
- Lifts of small size – Easy to load in vehicles
- Greater manoeuvrability for an easy, safe and convenient Lift operation.
- Fast and easy set-up with no tools required. There are no loose parts
- Compact and lightweight designs for easy handling. One person operation
- Domestic and industrial applications. Indoor & outdoor uses
- Maximum versatility. A wide range of accessories & adapters available to fulfil all lifting needs
- Portable designs for easy transportation and storage in small places. Corridor and single-door access
- Sturdy steel base (Epoxy coated for outside uses) with non-marring castors
- Made in Spain – 100 % Service. Availability of all accessories & spare parts!
- Brake winches that lock the load in place when handle/s is/are released.
- Manual winches provided with one or two removable handles for easy lift storage.
- Lifts are equipped with three Safety Systems to guarantee maximum reliability (triple margin of safety).
- Aluminium and steel sturdy but light construction designed to lift, position and install a large variety of materials.
- Reversible forks for added height and better load positioning.
- All ranges of Lifts comply with the European standards guaranteeing maximum safety and resistance.



GUIL - Innovative ideas in Lifting Engineering

Comparative table



ELC MODELS



REFERENCE	Maximum Height	Maximum Load	Height Stowed
ELC-700	3,30 m 10 ft 10 in	85 Kg 187 lb	1,70 m 5 ft 7 in
ELC-710	4,00 m 13 ft 1.5 in	100 Kg 220 lb	1,65 m 5 ft 5 in
ELC-720	3,50 m 11 ft 6 in	125 Kg 276 lb	1,35 m 4 ft 5 in
ELC-725 ELC-725/D	4,00 m 13 ft 1.5 in	125 Kg 276 lb	1,32 m 4 ft 4 in
ELC-730/R	4,60 m 15 ft 1 in	125 Kg 276 lb	1,45 m 4 ft 9 in
ELC-755	4,50 m 14 ft 9 in	180 Kg 397 lb	1,57 m 5 ft 2 in
ELC-765	5,22 m 17 ft 2 in	230 Kg 507 lb	1,77 m 5 ft 10 in
ELC-775	5,22 m 17 ft 2 in	270 Kg 595 lb	1,77 m 5 ft 10 in
ELC-785	5,22 m 17 ft 2 in	300 Kg 661 lb	1,77 m 5 ft 10 in

TORO A-RANGE



TORO E-RANGE



REFERENCE	Maximum Height	Maximum Load	Height Stowed
TORO A-101/C	2,90 m 9 ft 6 in	170 Kg 375 lb	1,75 m 5 ft 9 in
TORO A-102/C	4,10 m 13 ft 5 in	170 Kg 375 lb	1,75 m 5 ft 9 in
TORO E-501/C	3,45 m 11 ft 4 in	200 Kg 441 lb	1,61 m 5 ft 3 in

TORO B-RANGE



REFERENCE	Maximum Height	Maximum Load	Height Stowed
TORO B-201/C	4,00 m 13 ft 1.5 in	250 Kg 551 lb	1,66 m 5 ft 5 in
TORO B-201 PLUS	5,00 m 16 ft 5 in	250 Kg 551 lb	1,96 m 6 ft 5 in
TORO B-202/C	5,15 m 16 ft 11 in	230 Kg 507 lb	1,66 m 5 ft 5 in
TORO B-202 PLUS	6,50 m 21 ft 4 in	230 Kg 507 lb	1,96 m 6 ft 5 in
TORO B-203/C	6,30 m 20 ft 8 in	220 Kg 485 lb	1,66 m 5 ft 5 in

TORO C-RANGE



REFERENCE	Maximum Height	Maximum Load	Height Stowed
TORO C-301/C	3,85 m 12 ft 8 in	350 Kg 772 lb	1,60 m 5 ft 3 in
TORO C-302/C	5,00 m 16 ft 5 in	330 Kg 727 lb	1,60 m 5 ft 3 in
TORO C-303	5,00 m 16 ft 5 in	350 Kg 772 lb	1,98 m 6 ft 6 in
TORO C-304/C	6,00 m 19 ft 8 in	320 Kg 705 lb	1,60 m 5 ft 3 in
TORO C-305	6,50 m 21 ft 4 in	320 Kg 705 lb	1,98 m 6 ft 6 in
TORO C-306	8,00 m 26 ft 3 in	300 Kg 661 lb	1,98 m 6 ft 6 in

TORO D-RANGE



REFERENCE	Maximum Height	Maximum Load	Height Stowed
TORO D-401	3,55 m 11 ft 8 in	440 Kg 970 lb	1,98 m 6 ft 6 in
TORO D-402/C	3,85 m 12 ft 8 in	420 Kg 926 lb	1,60 m 5 ft 3 in
TORO D-403/C	5,00 m 16 ft 5 in	400 Kg 882 lb	1,60 m 5 ft 3 in
TORO D-404	5,00 m 16 ft 5 in	420 Kg 926 lb	1,98 m 6 ft 6 in
TORO D-405/C	6,00 m 19 ft 8 in	350 Kg 772 lb	1,60 m 5 ft 3 in
TORO D-406	6,50 m 21 ft 4 in	400 Kg 882 lb	1,98 m 6 ft 6 in
TORO D-407	8,00 m 26 ft 3 in	350 Kg 772 lb	1,98 m 6 ft 6 in



TECHNICAL SPECIFICATIONS

Maximum height	3.30 m
Maximum load	85 Kg
Working height	1.70 m
Net weight	12.80 Kg
Minimum load	Not required
Working base span	Ø1600 mm
Folded dimensions	190x300x1700 mm
Material	Steel
Adaptors	Ø35 mm
Complies with Standards DGUV Regulation 17 & 18, DGUV Rule 115-002 DIN 56950-1, 2006/42/CE	



ADAPTORS & ACCESSORIES ELC

LOAD TRAYS



BC-02/H
800 x 400 mm



BC-06/H
450 x 450 mm



ALUMINIUM **BC-09/H**
800 x 400 mm



ALUMINIUM **BC-05/H**
450 x 435 x 140 mm



ALUMINIUM **BC-07/H**
450 x 435 x 140 mm



BC-12/H

AWNING

PIPE CRADLE



CV-10/H

FLOOD-LIGHTS ADAPTORS



FCA-04





BC-02/H
Loading platform
80 x 40 cm
(NOT INCLUDED)



Ø 35 mm
Top spigot



R2-710
Set of 3 castors
(Not included)



TECHNICAL SPECIFICATIONS

Maximum height	4.00 m
Maximum load	100 Kg
Working height	1.65 m
Net weight	20.5 Kg
Minimum load	Not required
Working base span	- Ø1.15m / +1.65m
Folded dimensions	180x310x1650 mm
Material	Steel
Adaptors	Ø35 mm
Complies with Standards	
DGUV Regulation 17 & 18, DGUV Rule 115-002	
DIN 56950-1, 2006/42/CE	



ADAPTORS & ACCESSORIES ELC

LOAD TRAYS



BC-02/H
800 x 400 mm



BC-06/H
450 x 450 mm



BC-09/H
ALUMINIUM
800 x 400 mm



BC-05/H
ALUMINIUM
450 x 435 x 140 mm



BC-07/H
ALUMINIUM
450 x 435 x 140 mm



BC-12/H
AWNING

PIPE CRADLE



CV-10/H

WHEELS



R2-710



Set of 3 wheels

GROUND FIXING



CSP-01

FLOOD-LIGHT ADAPTOR



FCA-04



BC-02/M
Loading platform
80 x 40 cm
(NOT INCLUDED)



BC-06/M
Loading platform
45 x 45 cm
(NOT INCLUDED)



(Castors not included)



ELC-720

Material Lifters

TECHNICAL SPECIFICATIONS

Maximum height	3.50 m
Maximum load	125 Kg
Working height	1.35 m
Net weight	25 Kg
Working base span	- Ø106cm/+ Ø154cm
Folded dimensions	220x330x1350 mm
Minimum load	Not required
No of sections	3
For adaptors	Ø35 mm
Safety	ASB System
Material	Steel
Complies with Standards	
DGUV Regulation 17 & 18, DGUV Rule 115-002	
DIN 56950-1, 2006/42/CE	



ADAPTORS & ACCESSORIES ELC

LOAD TRAYS



PIPE CRADLE



WHEELS



GROUND FIXING



FLOOD-LIGHT ADAPTORS





ELC-725 Material Lifts



ELC-725 Material lifts

TECHNICAL SPECIFICATIONS

Maximum Height	3.94 m
Maximum Height with platform	4.00 m
Maximum Load	125 Kg
Minimum Height	1.32 m
Minimum Height with platform	1.38 m
Net Weight	50 Kg
Footprint	Ø1.08 m
Folded Dimensions	50 x 56 x 132 cm
Material	Steel
BC-10 Platform	Included
Weight	4 kg
Dimensions	55 x 50 cm
Male Adaptor	Ø35 mm

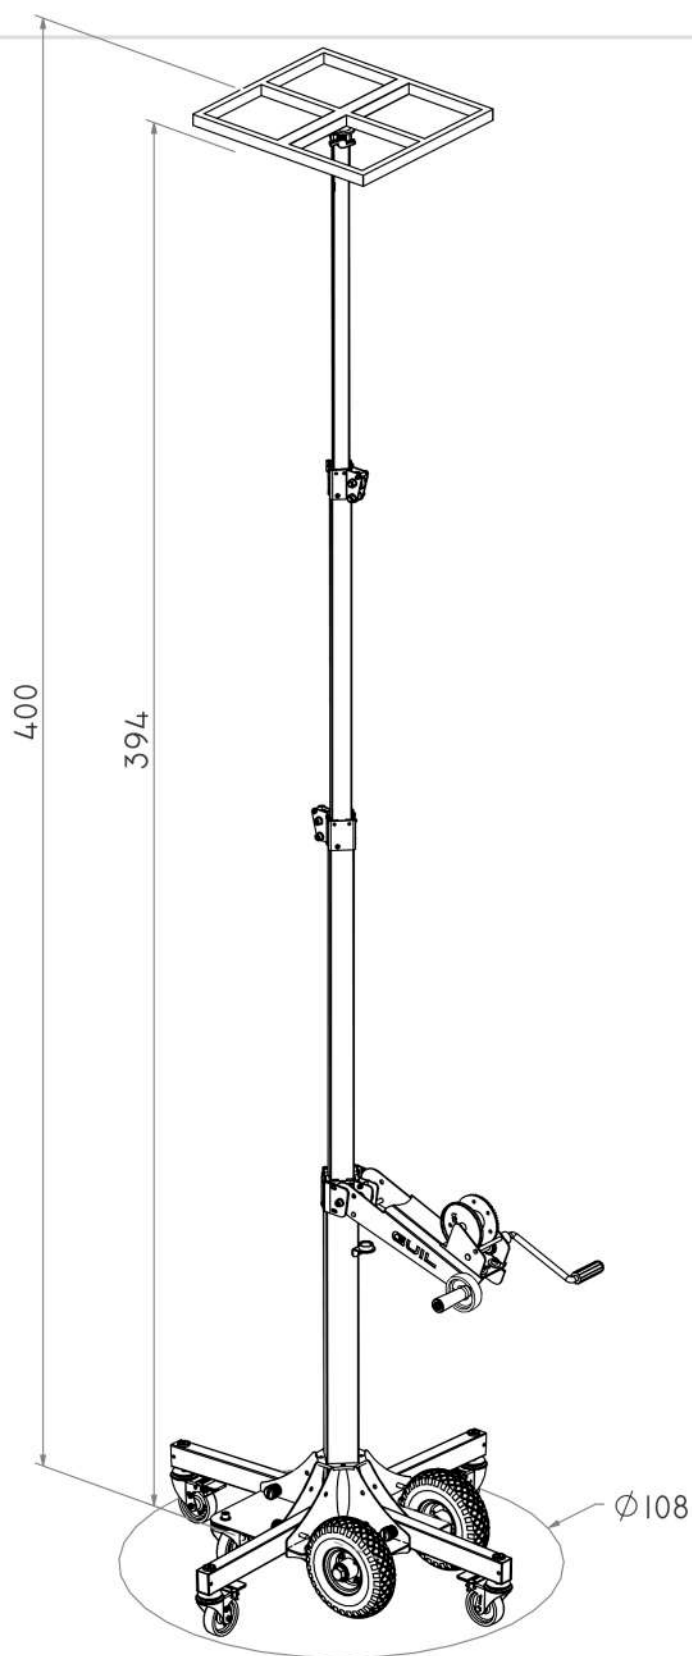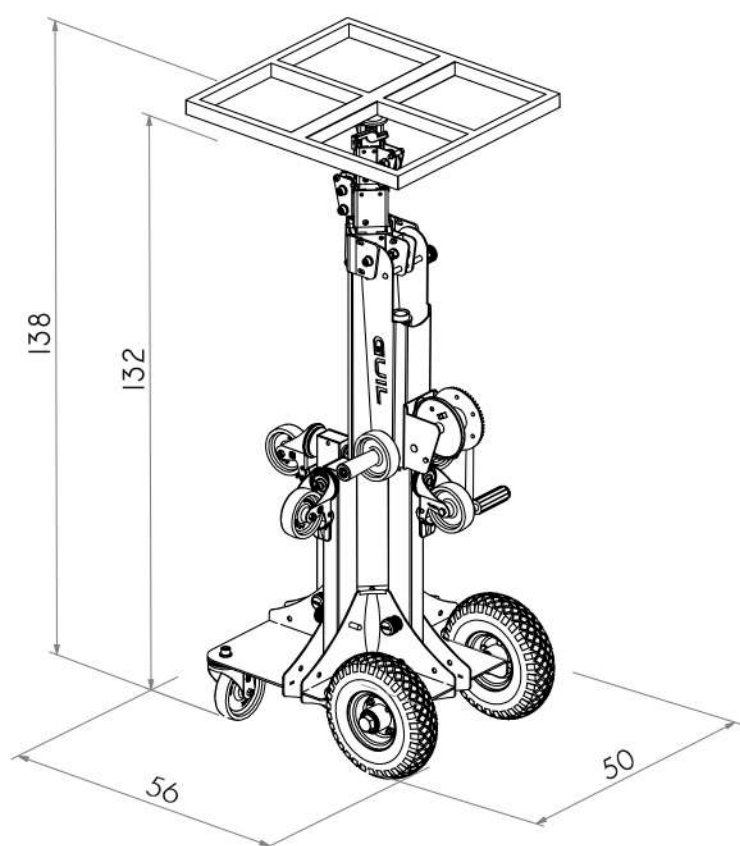

MAIN FEATURES:

- > Height-adjustable legs
- > Foldable Legs with wheels
- > Fitted with 2 all-terrain wheels

PACKAGING

Dimensions (L x W x H)	70 x 57 x 140 cm
Gross Weight	55 kg

ELC-725/D

Material Lifts



ELC-725/D

Material lifts

TECHNICAL SPECIFICATIONS

Maximum Height	3.94 m
Maximum Height with platform	4.00 m
Maximum Load	125 Kg
Minimum Height	1.32 m
Minimum Height with platform	1.38 m
Net Weight	51 Kg
Footprint	Ø1.08 m
Folded Dimensions	50 x 56 x132 cm
Material	Steel
BC-10 Platform	Included
Weight	4 kg
Dimensions	55 x 50 cm
Male Adaptor	Ø35 mm



MAIN FEATURES:

- > Double-handled winch
- > Height-adjustable legs
- > Foldable Legs with wheels
- > Fitted with 2 all-terrain wheels

PACKAGING

Dimensions (L x W x H)	70 x 57 x 140 cm
Gross Weight	55 kg

BC-02/M
Loading platform
80 x 40 cm
(NOT INCLUDED)



TECHNICAL SPECIFICATIONS

Maximum height	4.60 m
Maximum load	125 Kg
Folded height	1.45 m
Net weight	42 Kg
Working base span	Ø1130 mm
Folded dimensions	300x380x1450 mm
Minimum load	Not required
No of sections	4
For adaptors	Ø35 mm
Safety	ASB System
Material	Steel
Complies with Standards	
DGUV Regulation 17 & 18, DGUV Rule 115-002	
DIN 56950-1, 2006/42/CE	



ADAPTORS & ACCESSORIES ELC

LOAD TRAYS



BC-02/M
800 x 400 mm




BC-06/M
450 x 450 mm



BC-09/M
800 x 400 mm
ALUMINIUM



BC-05/M
450 x 435 x 140 mm
ALUMINIUM

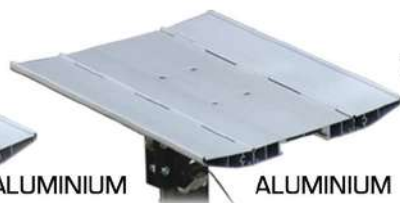

BC-07/M
450 x 435 x 140 mm
ALUMINIUM



BC-12/M
AWNING



ADT-100
MARQUEES



CV-10/M
PIPE CRADLE



RD-02
WHEELS



ACT-07
FLOOD-LIGHT ADAPTORS



FCA-06



For adaptors with a
Ø 35 mm spigot.



BC-02/M
Loading platform
80 x 40 cm
(NOT INCLUDED)



TECHNICAL SPECIFICATIONS

Maximum height	4.50 m
Maximum load	180 Kg
Working height	1.57 m
Net weight	79 Kg
Minimum load	25 Kg
Working base span	Ø 2.25 m
Folded Dimensions	450x450x1570 mm
Material	Steel
Adaptors	Ø35 mm
Complies with Standards	
DGUV Regulation 17 & 18, DGUV Rule 115-002	
DIN 56950-1, 2006/42/CE	



ADAPTORS & ACCESSORIES ELC

LOAD TRAYS




BC-02/M
800 x 400 mm



BC-06/M
450 x 450 mm



ALUMINIUM **BC-09/M**
800 x 400 mm

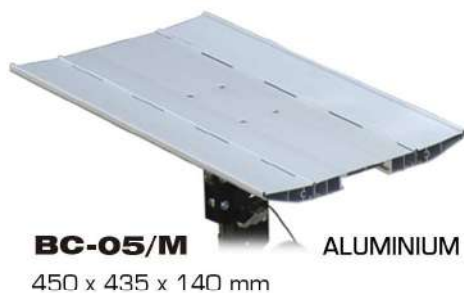

BC-05/M ALUMINIUM
450 x 435 x 140 mm

Folded Dimensions:
450 x 435 x 150 mm



ALUMINIUM **BC-07/M**
450 x 435 x 140 mm

Folded Dimensions:
450 x 230 x 150 mm



PIPE CRADLE



CV-10/M

AWNING



BC-12/M

FLOOD-LIGHT ADAPTOR



FCA-06



BC-02/M2
Loading platform
80 x 40 cm
(NOT INCLUDED)

For adaptors with a
Ø 50-55 mm spigot.



TECHNICAL SPECIFICATIONS

Maximum height	5.22 m
Maximum load	230 Kg
Working height	1.77 m
Net weight	98 Kg
Minimum load	25 Kg
Working base span	Ø 2.23 m
Folded Dimensions	450x450x1770 mm
Material	Steel
Adaptors	Ø55 mm
Complies with Standards	
DGUV Regulation 17 & 18, DGUV Rule 115-002	
DIN 56950-1, 2006/42/CE	



ADAPTORS & ACCESSORIES ELC

LOAD TRAYS



BC-02/M2
800 x 400 mm



BC-09/M2
800 x 400 mm
ALUMINIUM



BC-12/M2


AWNING



BC-02/M2
Loading platform
80 x 40 cm
(NOT INCLUDED)


For adaptors with a
Ø 50-55 mm spigot.

BULL300D

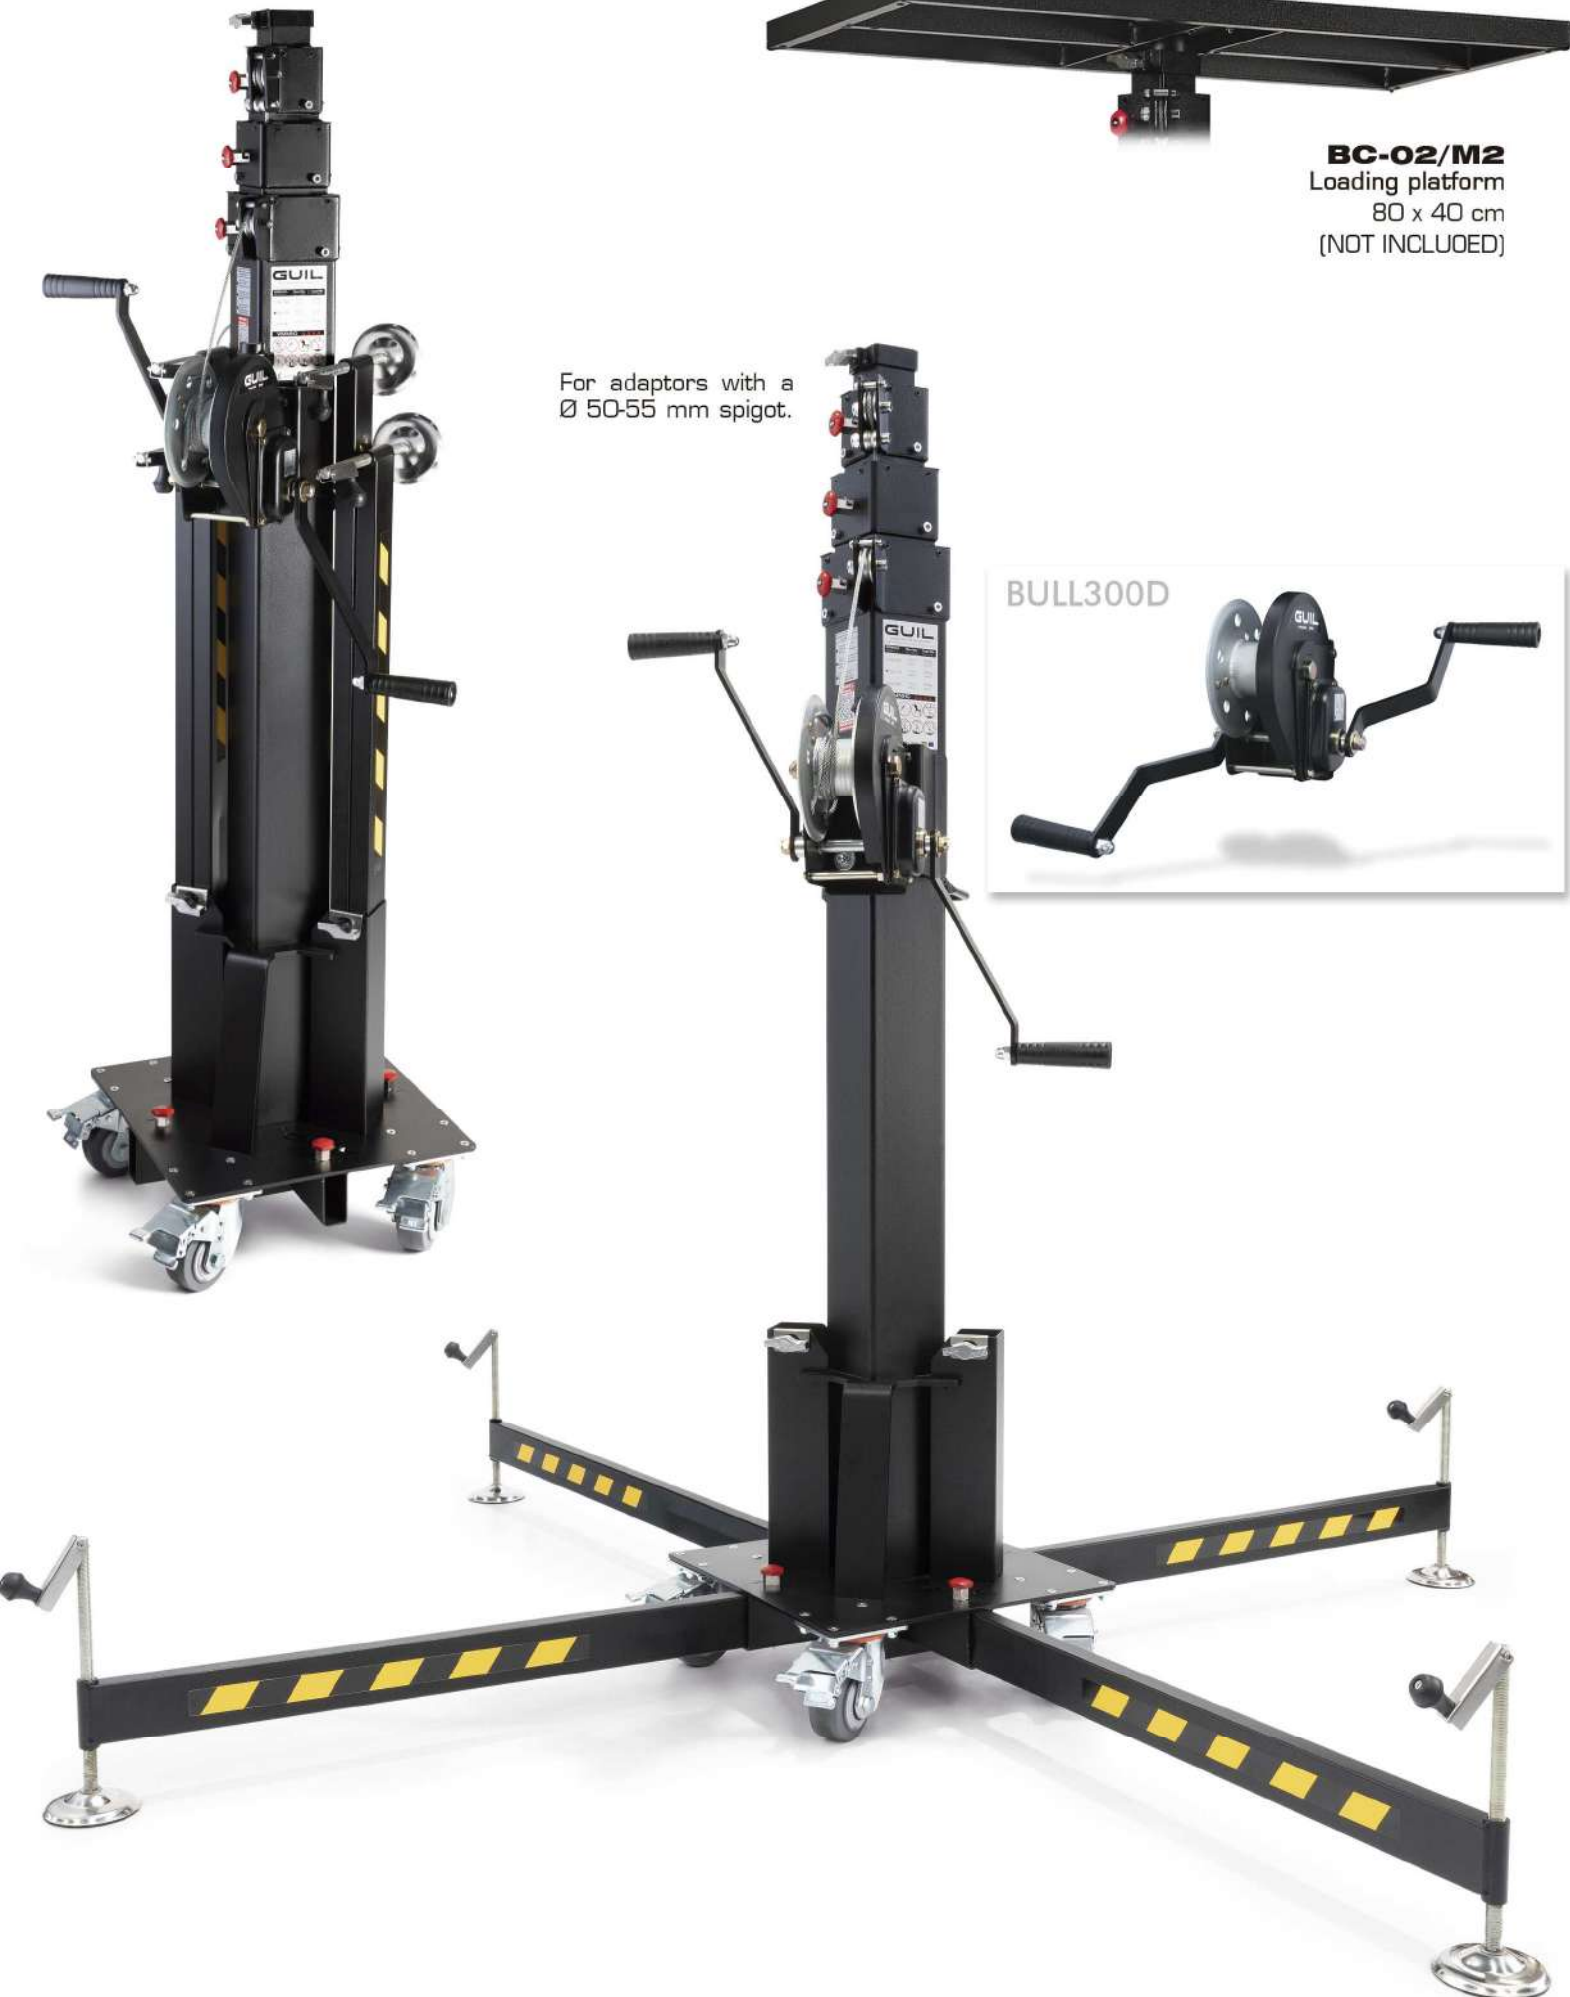

TECHNICAL SPECIFICATIONS

Maximum height	5.22 m
Maximum load	270 Kg
Working height	1.77 m
Net weight	100 Kg
Minimum load	25 Kg
Working base span	Ø 2.23 m
Folded Dimensions	450x450x1770 mm
Material	Steel
Adaptors	Ø55 mm
Complies with Standards DGUV Regulation 17 & 18, DGUV Rule 115-002 DIN 56950-1, 2006/42/CE	

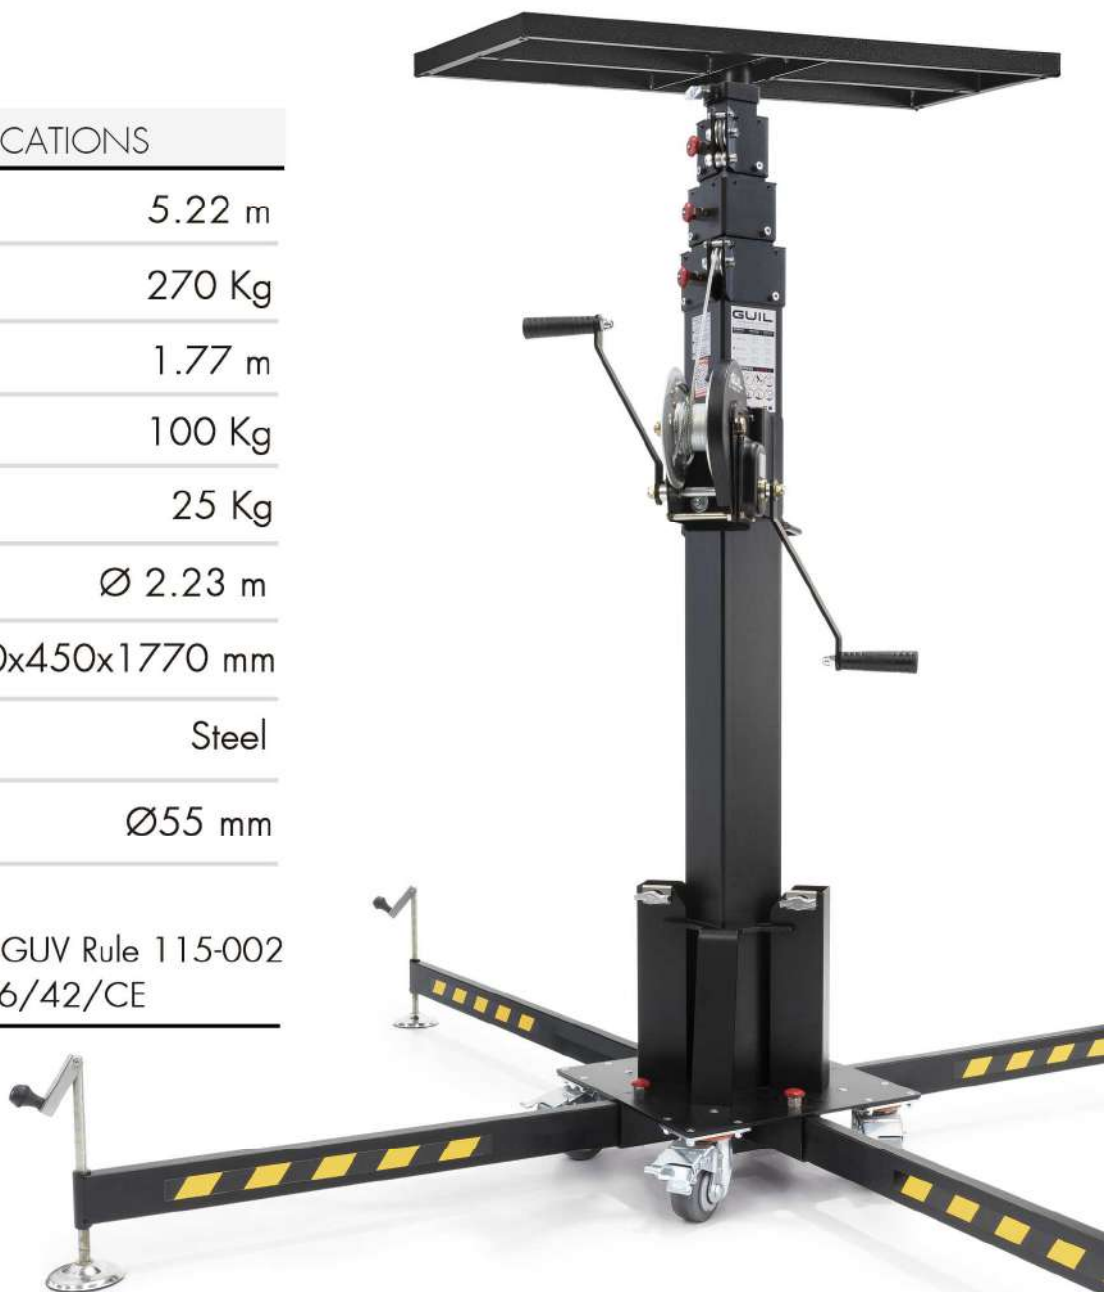

ADAPTORS & ACCESSORIES ELC

LOAD TRAYS



BC-02/M2
800 x 400 mm



BC-09/M2
800 x 400 mm
ALUMINIUM



AWNING

BC-12/M2



BC-02/M2
Loading platform
80 x 40 cm
(NOT INCLUDED)

For adaptors with a
Ø 50-55 mm spigot.



BULL400D



TECHNICAL SPECIFICATIONS

Maximum height	5.22 m
Maximum load	300 Kg
Working height	1.77 m
Net weight	102,5 Kg
Minimum load	25 Kg
Working base span	Ø 2.23 m
Folded Dimensions	450x450x1770 mm
Material	Steel
Adaptors	Ø55 mm
Complies with Standards	
DGUV Regulation 17 & 18, DGUV Rule 115-002	
DIN 56950-1, 2006/42/CE	



ADAPTORS & ACCESSORIES ELC

LOAD TRAYS



BC-02/M2
800 x 400 mm



BC-09/M2
800 x 400 mm
ALUMINIUM



BC-12/M2

AWNING

TORO A-Range

Material Lifts



	TORO A-101/C	TORO A-102/C
↑	2,90 m 9 ft 6 in	4,10 m 13 ft 5.5 in
↕	170 kg 375 lb	170 kg 375 lb
↓	1,75 m 5 ft 9 in	1,75 m 5 ft 9 in
⬆	73 Kg 161 lb	85 Kg 187 lb

TORO MATERIAL LIFTS ARE EQUIPPED WITH TWO SAFETY SYSTEMS



Auto-brake winches.
CE Machinery Directives



Internal Pendulum
Brake System (IPB)



Mast Section Unblocking
System (MSU)



More mast overlap.
Prevent fishing rod effect



Adjustable manoeuvring
handles
with wheels.



Reinforced forks included.
(Detachable). Reversible &
Adjustable design.



2 Stabiliser braces
for greater lift sta-
bility.




Adjustable mast blocking
system for horizontal
transportation.



Adjustable base




Large wheels for easy
manoeuvring

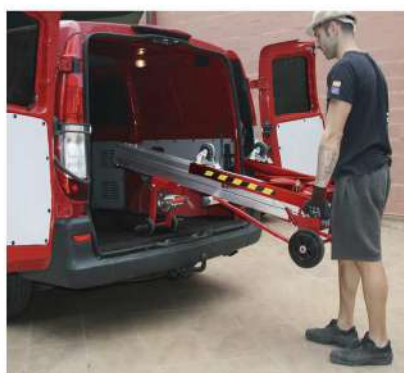

COMPACT DESIGNS



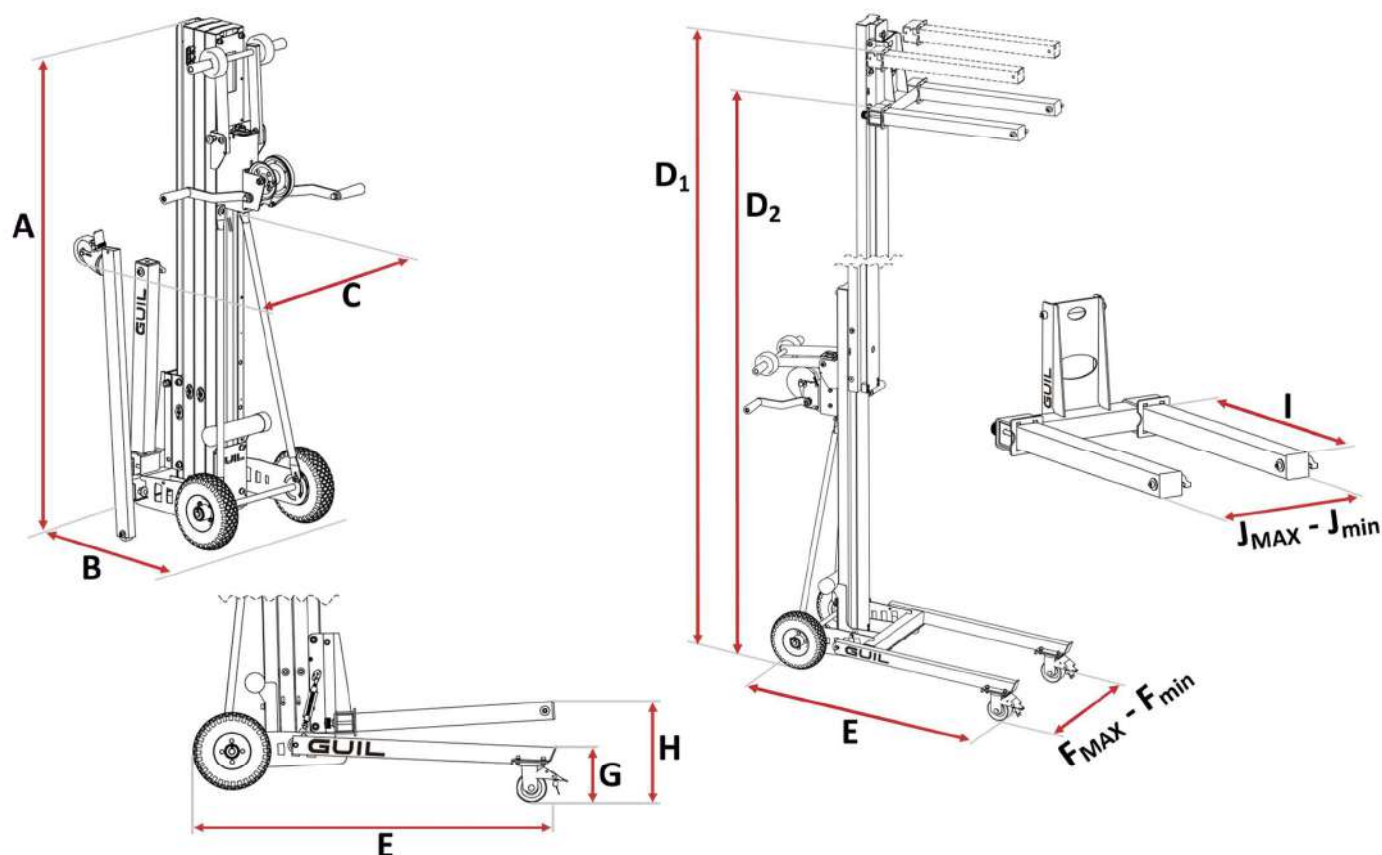

TORO A Range			TORO A-102/C	TORO A-101/C
Number of sections			3	2
Maximum load			170 kg 375 lb	170 kg 375 lb
Weight			85 kg 187 lb	73 kg 161 lb
STOWED				
Height	A		175 cm 5 ft 9 in	175 cm 5 ft 9 in
Length	B		64 cm 2 ft 1 in	64 cm 2 ft 1 in
Width	C		64 cm 2 ft 1 in	64 cm 2 ft 1 in
WORKING MEASUREMENTS				
Maximum height	Forks up	D ₁	410 cm 13 ft 5.5 in	290 cm 9 ft 6 in
	Forks down	D ₂	380 cm 12 ft 5.5 in	265 cm 8 ft 8 in
Length		E	130 cm 4 ft 3 in	130 cm 4 ft 3 in
Width	Maximum	F _{MAX}	82 cm 2 ft 8 in	82 cm 2 ft 8 in
	Minimum	F _{min}	64 cm 2 ft 1 in	64 cm 2 ft 1 in
Leg height		G	19.5 cm 7.5 in	19.5 cm 7.5 in
Load height		H	32 cm 1 ft 0.5 in	32 cm 1 ft 0.5 in
FORKS				
Length		I	66 cm 2 ft 2 in	66 cm 2 ft 2 in
Maximum width		J _{MAX}	42.5 cm 1 ft 4.5 in	42.5 cm 1 ft 4.5 in
Minimum width		J _{min}	30 cm 12 in	30 cm 12 in

TORO B-Range

Material Lifts



	TORO B-201/C	TORO B-201 PLUS	TORO B-202/C	TORO B-202 PLUS	TORO B-203/C
↑	4,00 m 13 ft 1.5 in	5,00 m 16 ft 5 in	5,15 m 16 ft 11 in	6,50 m 21 ft 4 in	6,30 m 20 ft 8 in
kg	250 kg 551 lb	250 kg 551 lb	230 kg 507 lb	230 kg 507 lb	220 kg 485 lb
↓	1,66 m 5 ft 5.5 in	1,96 m 6 ft 5 in	1,66 m 5 ft 5.5 in	1,96 m 6 ft 5 in	1,66 m 5 ft 5.5 in
kg	125 Kg 276 lb	125 Kg 276 lb	132 Kg 291 lb	141 Kg 311 lb	139 Kg 306 lb

TORO B-Range Details

TORO MATERIAL LIFTS ARE EQUIPPED WITH TWO SAFETY SYSTEMS



Auto-brake winch.
CE Machinery Directives



Internal Pendulum
Brake System (IPB)



Mast Section Unblocking
System (MSU)



More mast overlap.
Prevents fishing rod effect



Adjustable manoeuvring handle
with wheels included.



Reinforced forks included.
(Detachable). Reversible &
Adjustable design.



2 Stabiliser braces for
greater lift stability.



Adjustable mast blocking
system for horizontal trans-
portation.



Spirit level



Folding side legs
included

Legs can be inserted in
the front or back of the
tower for positioning close
to walls.




Adjustable legs

Compact designs and 12 wheels included for
easy manoeuvring (Vertically and horizontally)



Ø150 mm adjustable
wheels for perfect levelling.



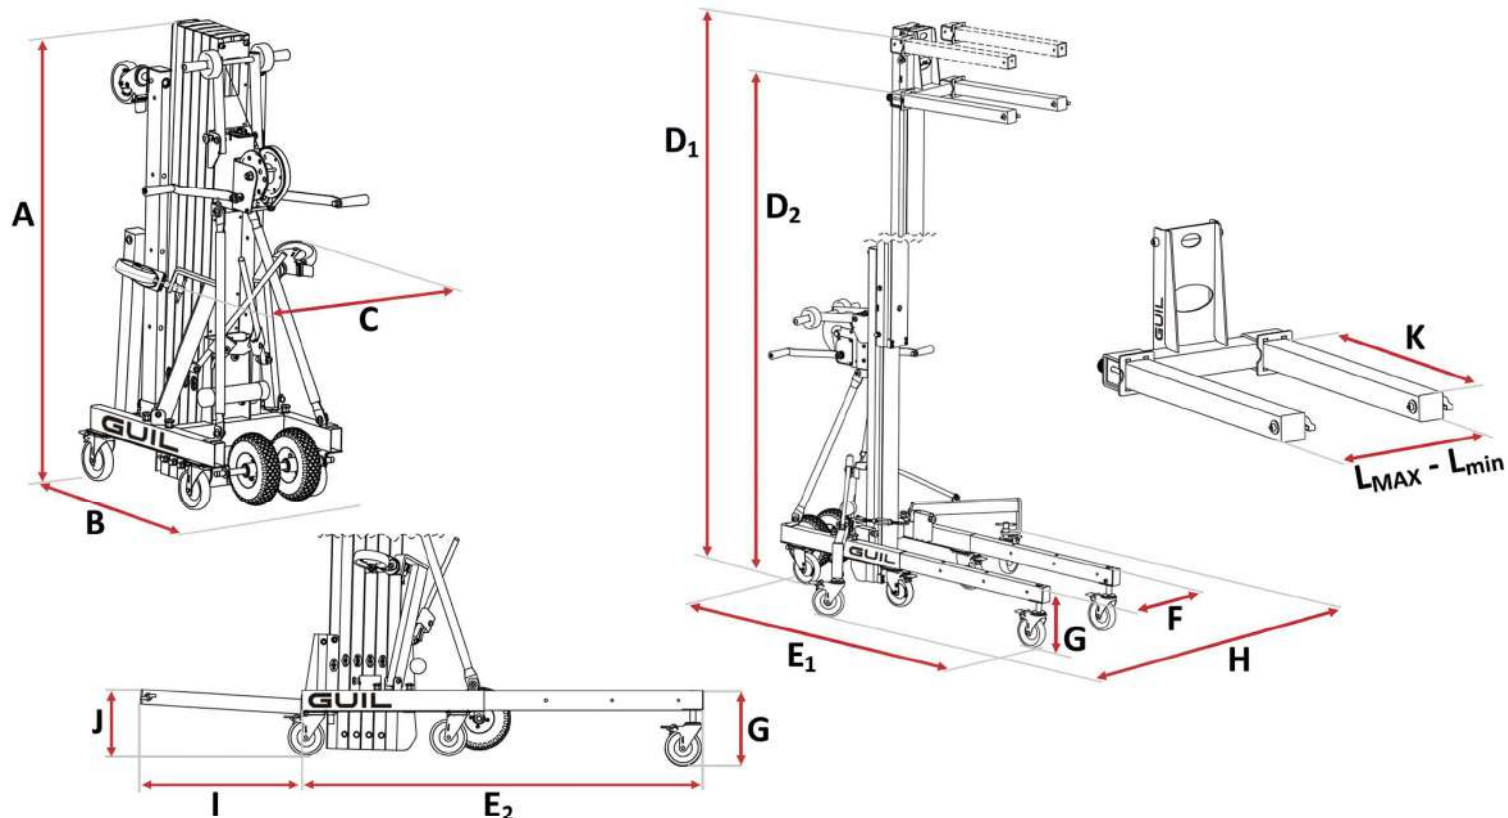

TORO B Range			TORO B-203/C	TORO B-202/C	TORO B-201/C	TORO B-202 PLUS	TORO B-201 PLUS
Number of sections			5	4	3	4	3
Maximum load			220 kg 485 lb	230 kg 507 lb	250 kg 551 lb	230 kg 507 lb	250 kg 551 lb
Weight			139 kg 306 lb	132 kg 291 lb	125 kg 276 lb	141 kg 311 lb	125 kg 276 lb
STOWED							
Height	A		166 cm 5 ft 5.5 in	166 cm 5 ft 5.5 in	166 cm 5 ft 5.5 in	196 cm 6 ft 5 in	196 cm 6 ft 5 in
Length	B		88 cm 2 ft 10.5 in	88 cm 2 ft 10.5 in	88 cm 2 ft 10.5 in	88 cm 2 ft 10.5 in	88 cm 2 ft 10.5 in
Width	C		65 cm 2 ft 1.5 in	65 cm 2 ft 1.5 in	65 cm 2 ft 1.5 in	65 cm 2 ft 1.5 in	65 cm 2 ft 1.5 in
WORKING MEASUREMENTS							
Maximum height	Forks up	D ₁	630 cm 20 ft 8 in	515 cm 16 ft 11 in	400 cm 13 ft 1.5 in	650 cm 21 ft 4 in	500 cm 16 ft 5 in
	Forks down	D ₂	605 cm 19 ft 10 in	490 cm 16 ft 1 in	375 cm 12 ft 3.5 in	610 cm 20 ft	460 cm 15 ft 1 in
Length	Front legs	E ₁	177 cm 5 ft 9.5 in	177 cm 5 ft 9.5 in	177 cm 5 ft 9.5 in	177 cm 5 ft 9.5 in	177 cm 5 ft 9.5 in
	Back legs	E ₂	167 cm 5 ft 5.5 in	167 cm 5 ft 5.5 in	167 cm 5 ft 5.5 in	167 cm 5 ft 5.5 in	167 cm 5 ft 5.5 in
Width		F	60 cm 1 ft 11.5 in	60 cm 1 ft 11.5 in	60 cm 1 ft 11.5 in	60 cm 1 ft 11.5 in	60 cm 1 ft 11.5 in
Leg height		G	28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in
Width w/ stabilisers unfolded		H	136 cm 4 ft 5.5 in	136 cm 4 ft 5.5 in	136 cm 4 ft 5.5 in	136 cm 4 ft 5.5 in	136 cm 4 ft 5.5 in
Distance to the wall		I	65 cm 2 ft 1.5 in	65 cm 2 ft 1.5 in	65 cm 2 ft 1.5 in	65 cm 2 ft 1.5 in	65 cm 2 ft 1.5 in
Load height		J	28 cm 11 in	28 cm 11 in	28 cm 11 in	29 cm 11.5 in	29 cm 11.5 in
FORKS							
Length		K	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in
Maximum width		L _{MAX}	42.5 cm 1 ft 4.5 in	42.5 cm 1 ft 4.5 in	42.5 cm 1 ft 4.5 in	42.5 cm 1 ft 4.5 in	42.5 cm 1 ft 4.5 in
Minimum width		L _{min}	30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in



	TORO C-301/C	TORO C-302/C	TORO C-303	TORO C-304/C	TORO C-305	TORO C-306
+↑	3,85 m 12 ft 7.5 in	5,00 m 16 ft 5 in	5,00 m 16 ft 5 in	6,00 m 19 ft 8 in	6,50 m 21 ft 4 in	8,00 m 26 ft 3 in
kg ↓	350 kg 772 lb	330 kg 728 lb	350 kg 772 lb	320 kg 705 lb	320 kg 705 lb	300 kg 661 lb
-↓	1,60 m 5 ft 3 in	1,60 m 5 ft 3 in	1,98 m 6 ft 6 in	1,60 m 5 ft 3 in	1,98 m 6 ft 6 in	1,98 m 6 ft 6 in
kg	152 Kg 335 lb	169 Kg 373 lb	161 Kg 355 lb	182 Kg 401 lb	179 Kg 395 lb	197 Kg 434 lb

TORO C-Range Details

TORO MATERIAL LIFTS ARE EQUIPPED WITH TWO SAFETY SYSTEMS



Auto-brake winch.
CE Machinery Directives



Internal Pendulum
Brake System (IPB)



Mast Section Unblocking
System (MSU)



More mast overlap.
Prevents fishing rod effect



Adjustable manoeuvring
handle with Ø200 mm
wheels included.
(3 positions)



Reinforced forks included. (De-2 Stabiliser braces for
tachable). Reversible & Adjust- greater lift stability.
able design.



Adjustable mast blocking
system for horizontal transpor-
tation.



Folding side
legs included



Legs can be inserted in the front or
back of the tower for positioning
close to walls.



Spirit level


Adjustable legs

Compact designs and 12 wheels included for
easy manoeuvring (Vertically and horizontally)



Ø150 mm adjustable
wheels for perfect
levelling.



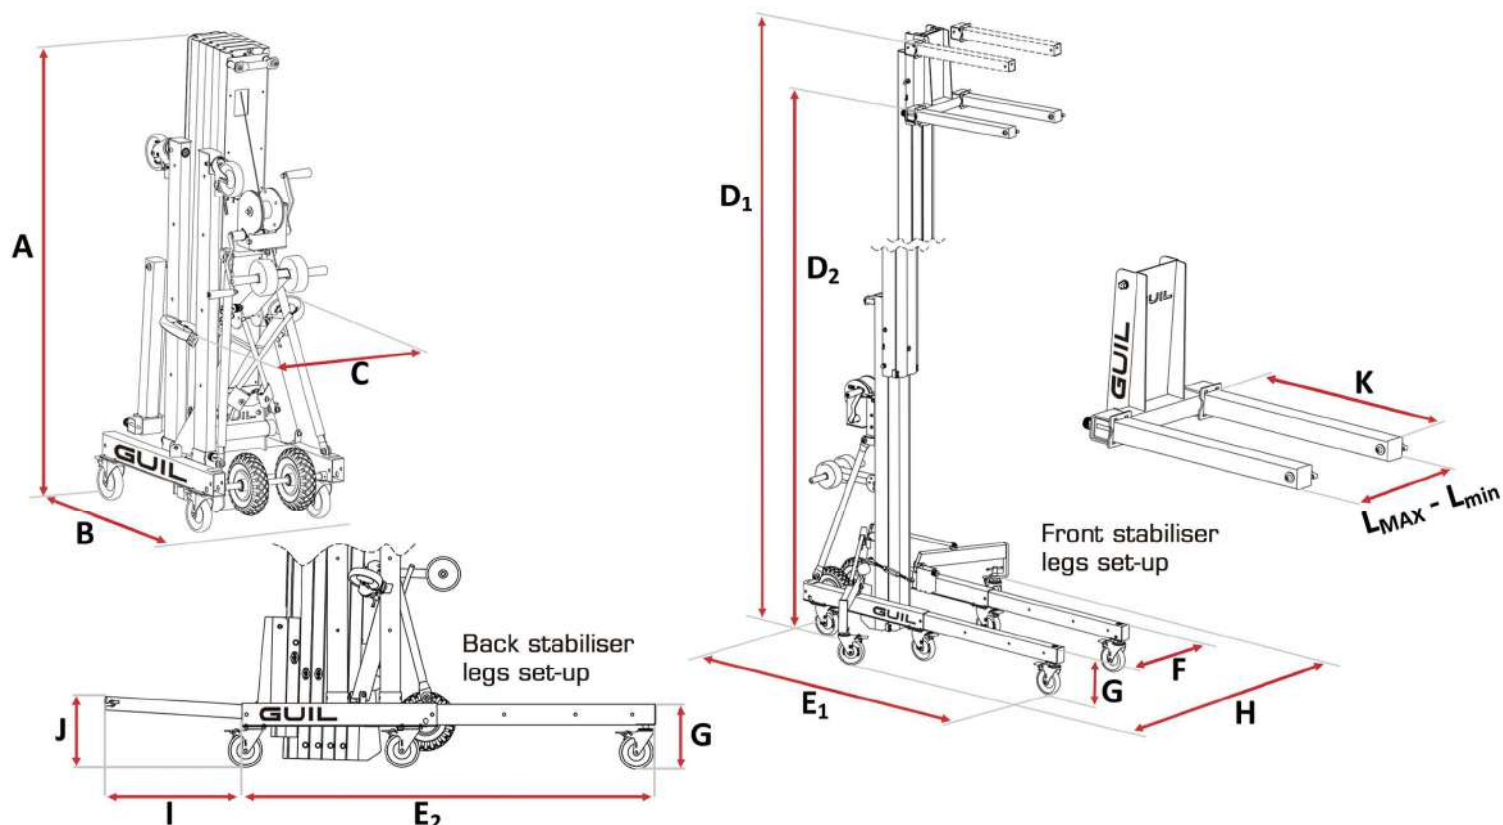

TORO C Range			TORO C-306	TORO C-305	TORO C-303	TORO C-304/C	TORO C-302/C	TORO C-301/C
Number of sections			5	4	3	5	4	3
Maximum load			300 kg 661 lb	320 kg 705 lb	350 kg 772 lb	320 kg 705 lb	330 kg 728 lb	350 kg 772 lb
Weight			197 kg 434 lb	179 kg 395 lb	161 kg 355 lb	182 kg 401 lb	169 kg 373 lb	152 kg 335 lb
STOWED								
Height	A		198 cm 6 ft 6 in	198 cm 6 ft 6 in	198 cm 6 ft 6 in	160 cm 5 ft 3 in	160 cm 5 ft 3 in	160 cm 5 ft 3 in
Length	B		95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in
Width	C		66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in
WORKING MEASUREMENTS								
Maximum height	Forks up	D ₁	800 cm 26 ft 3 in	650 cm 21 ft 4 in	500 cm 16 ft 5 in	600 cm 19 ft 8 in	500 cm 16 ft 5 in	385 cm 12 ft 7.5 in
	Forks down	D ₂	760 cm 24 ft 11 in	610 cm 20 ft	460 cm 15 ft 1 in	560 cm 18 ft 4.5 in	460 cm 15 ft 1 in	345 cm 11 ft 4 in
Length	Front legs	E ₁	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in
	Back legs	E ₂	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft
Width		F	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in
Leg height		G	28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in
Width w/ stabilisers unfolded		H	147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in
Distance to the wall		I	57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in
Load height		J	30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in
FORKS								
Length		K	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in
Maximum width		L _{MAX}	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in
Minimum width		L _{min}	33 cm 1 ft 1 in	33 cm 1 ft 1 in	33 cm 1 ft 1 in	33 cm 1 ft 1 in	33 cm 1 ft 1 in	33 cm 1 ft 1 in



	TORO D-401	TORO D-402/C	TORO D-403/C	TORO D-404	TORO D-405/C	TORO D-406	TORO D-407
↑	3,55 m 11 ft 8 in	3,85 m 12 ft 7.5 in	5,00 m 16 ft 5 in	5,00 m 16 ft 5 in	6,00 m 19 ft 8 in	6,50 m 21 ft 4 in	8,00 m 26 ft 3 in
kg	440 kg 970 lb	420 kg 926 lb	400 kg 882 lb	420 kg 926 lb	350 kg 772 lb	400 kg 882 lb	350 kg 772 lb
↓	1,98 m 6 ft 6 in	1,60 m 5 ft 3 in	1,60 m 5 ft 3 in	1,98 m 6 ft 6 in	1,60 m 5 ft 3 in	1,98 m 6 ft 6 in	1,98 m 6 ft 6 in
kg	154 Kg 339 lb	163 Kg 359 lb	179 Kg 395 lb	172 Kg 379 lb	196 Kg 432 lb	195 Kg 430 lb	215 Kg 474 lb

TORO D-Range Details

TORO MATERIAL LIFTS ARE EQUIPPED WITH TWO SAFETY SYSTEMS




Auto-brake winch with double handle.
CE Machinery Directives



Internal Pendulum Brake System (IPB)



Mast Section Unblocking System (MSU)



More mast overlap.
Prevents fishing rod effect



Adjustable manoeuvring handle with Ø200 mm wheels included.
(3 positions)



Reinforced forks included. (De-2 Stabiliser braces for tachable). Reversible & Adjust-greater lift stability. able design.



Adjustable mast blocking system for horizontal transportation.



Folding side legs included



Spirit level



Legs can be inserted in the front or back of the tower for positioning close to walls.


Adjustable legs

Compact designs and 12 wheels included for easy manoeuvring (Vertically and horizontally)



Ø150mm adjustable wheels for perfect levelling.







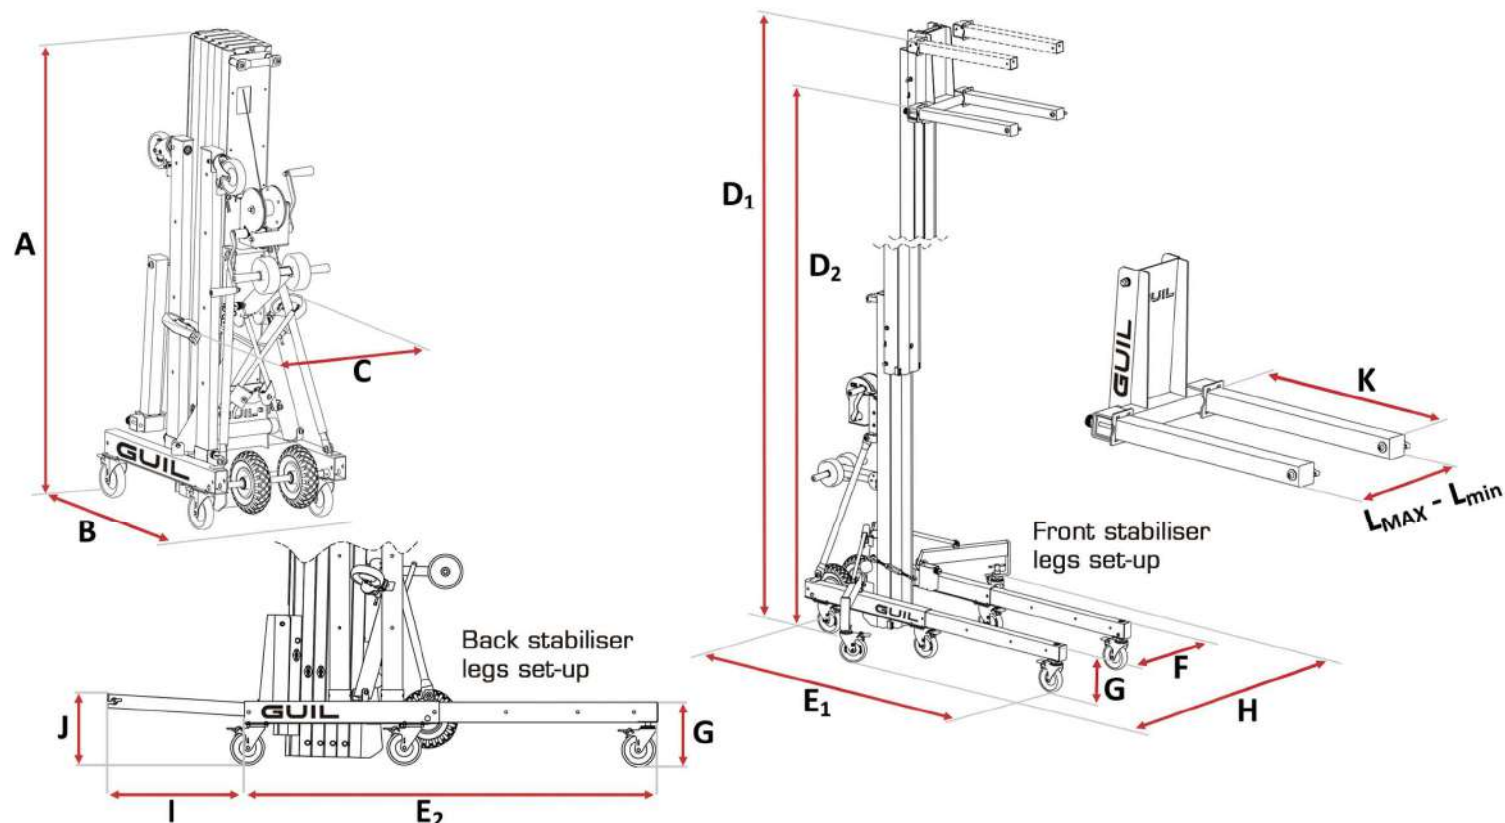


TORO D Range			TORO D-407	TORO D-406	TORO D-404	TORO D-401	TORO D-405/C	TORO D-403/C	TORO D-402/C
Number of sections			5	4	3	2	5	4	3
Maximum load			350 kg 772 lb	400 kg 882 lb	420 kg 926 lb	440 kg 970 lb	350 kg 772 lb	400 kg 882 lb	420 kg 926 lb
Weight			215 kg 474 lb	195 kg 430 lb	172 kg 379 lb	154 kg 339 lb	196 kg 432 lb	179 kg 395 lb	163 kg 359 lb
STOWED									
Height	A		198 cm 6 ft 6 in	198 cm 6 ft 6 in	198 cm 6 ft 6 in	198 cm 6 ft 6 in	160 cm 5 ft 3 in	160 cm 5 ft 3 in	160 cm 5 ft 3 in
Length	B		95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in	95 cm 3 ft 1.5 in
Width	C		66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in
WORKING MEASUREMENTS									
Maximum height	Forks up	D ₁	800 cm 26 ft 3 in	650 cm 21 ft 4 in	500 cm 16 ft 5 in	355 cm 11 ft 8 in	600 cm 19 ft 8 in	500 cm 16 ft 5 in	385 cm 12 ft 7.5 in
	Forks down	D ₂	760 cm 24 ft 11 in	610 cm 20 ft	460 cm 15 ft 1 in	315 cm 10 ft 4 in	560 cm 18 ft 4.5 in	460 cm 15 ft 1 in	345 cm 11 ft 4 in
Length	Front legs	E ₁	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in	192 cm 6 ft 3.5 in
	Back legs	E ₂	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft	183 cm 6 ft
Width	F		66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in
Leg height	G		28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in	28 cm 11 in
Width w/ stabilisers unfolded			147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in	147 cm 4 ft 10 in
Distance to the wall	I		57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in	57 cm 1 ft 10 in
Load height	J		30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in	30 cm 12 in
FORKS									
Length	K		66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in	66 cm 2 ft 2 in
Maximum width	L _{MAX}		46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in	46.5 cm 1 ft 6.5 in
Minimum width	L _{min}		35 cm 1 ft 2 in	35 cm 1 ft 2 in	35 cm 1 ft 2 in	35 cm 1 ft 2 in	35 cm 1 ft 2 in	35 cm 1 ft 2 in	35 cm 1 ft 2 in



TECHNICAL SPECIFICATIONS

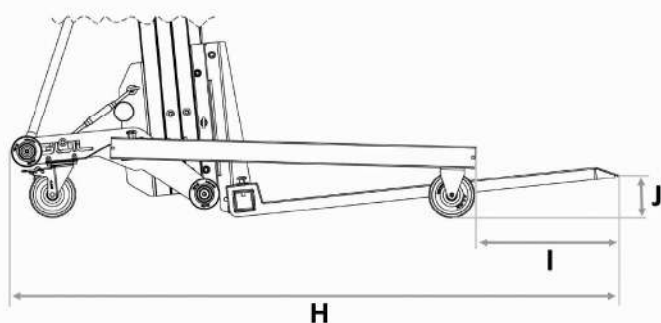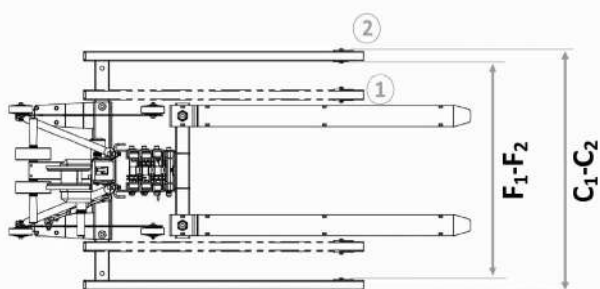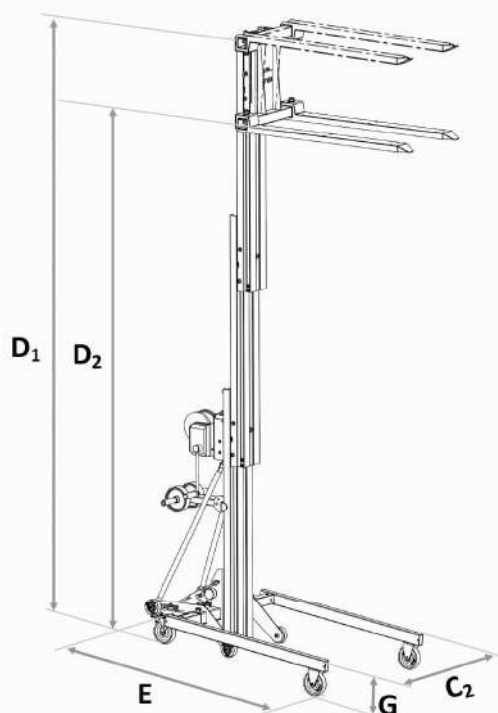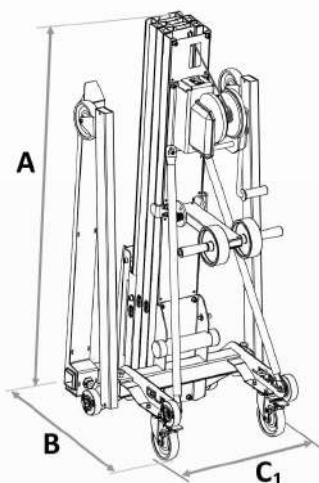

STOWED		cm / in	
Height	A	161 / 63	
Length	B	80 / 31	
Width	C ₁	69 / 27	
WORKING MEASUREMENTS		cm / in	
Maximum height	Forks up	D ₁	395 / 155
	Forks down	D ₂	345 / 136
Length	E	152 / 60	
Width	C ₂	102 / 40	
Base legs I.D.	Position 1	F ₁	61 / 24
	Position 2	F ₂	94 / 37
Leg height	G	23 / 9	
Total length	H	199 / 78	
Fork outthrust	I	47 / 18	
Load height	J	9 / 3.5	
FORKS		cm / in	
Length	K	109 / 43	
Outer width	L EXT	56 / 22	
Inner width	L INT	38 / 15	

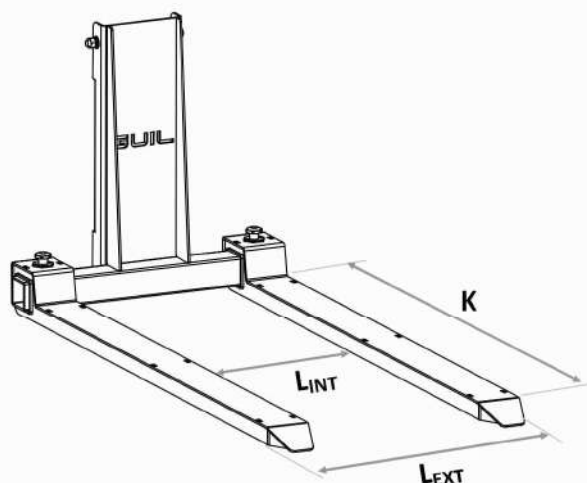

HRT FORK



ACT-01 PIPE CRADLE



ACT-04 LOAD PLATFORM ACT-04/M



*ACT-12 FORK EXTENSIONS



ACT-05 LOAD HOOK ARM



ACT-11 GLASS INSTALLATION



ACT-10 GLASS INSTALLATION



ACT-06 ROLLER DOOR & WINDOW SHUTTERS



ACT-07 FLOOD LIGHT ADAPTOR



*ACT-08 5-POSITION BOOM ARM



*ACT-15 FORK WIDENER



ACT-14 AWNING CRADLE



COUNTERWEIGHTS & HOLDER



ELECTRIC LIFTING SYSTEM

2 Systems in 1 - Manual & Electric
Practical system that allows you to raise the load electrically.

ELECTRIC

** CND-01

HANDLE EXTENSION



*This adaptor is not suitable for the A-Range towers.


**This adaptor is not suitable for the B-Range towers.

ADAPTADORES PARA VIDRIO ADAPTORS FOR GLASS

Ref. **ACT-08**

Ref. **ACT-10**

VIDRIO
GLASS

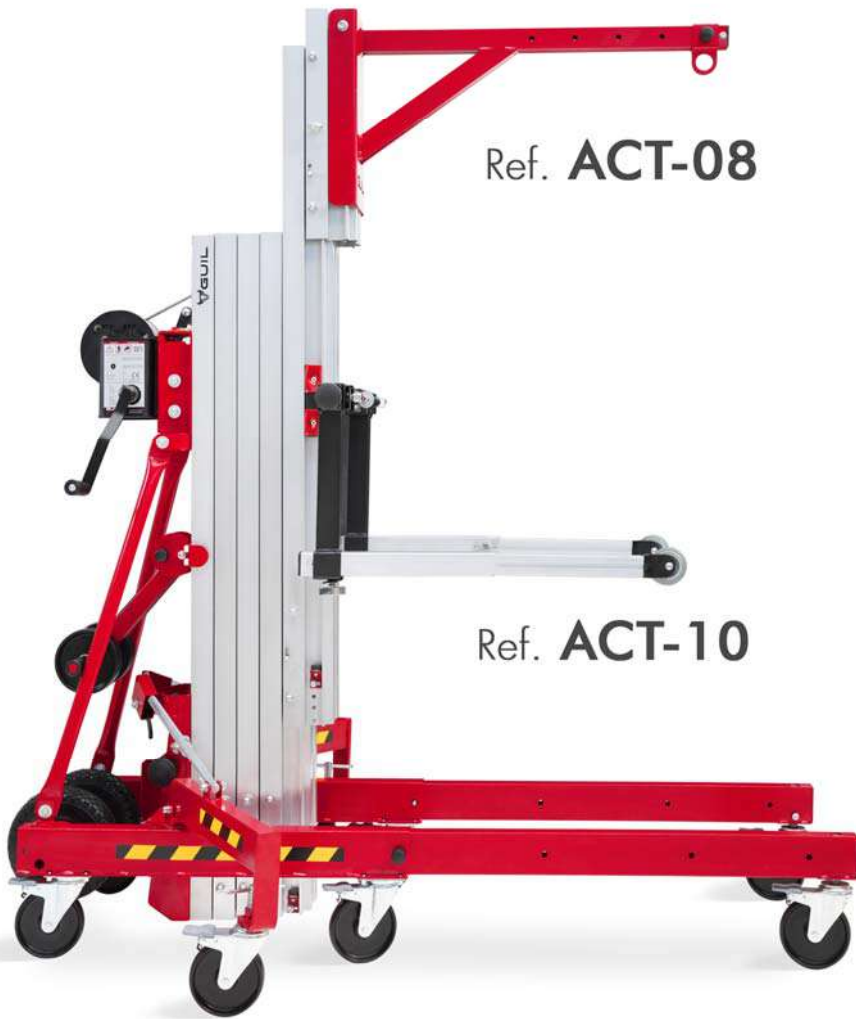

SISTEMA DE ELEVACIÓN ELÉCTRICO

ELECTRIC LIFTING SYSTEM



Electric Lifting System for TORO Lifters (B - C - D Ranges)



With this practical and very safe system, you have the possibility to raise and lower the TORO material lifts electrically (ranges B, C and D); converting the manual towers into electric towers.

The 'ELECTRIC' system is a very useful accessory which allows you to quickly and effortlessly raise the TORO lifters guaranteeing utmost safety at all times.

The accessory is made up of an industrial drill (brand: METABO, Germany), a power reducer and an adaptor to secure it to the hand winch on the lifter.

The adaptor ensures a firm fix of the drill so that the user is not required to hold the drill in place, allowing to work with just one hand.



The 'ELECTRIC' system is installed quickly and easily and has the following references depending on the tower it will be used with:

TORO B-Range towers — ref. ELECTRIC-B/2

Adapter and drill for ELECTRIC operation of TORO B-Range Lifts. Price includes a single-handled AL-KO 901 winch to replace the double-handled BULL300-D (Net Weight: 7.30 kg – without winch)

TORO C-Range towers — ref. ELECTRIC-C/2

Adapter and drill for ELECTRIC operation of TORO C- & E-Range Lifts. Price includes a single-handled AL-KO 901 winch to replace the double-handled BULL400-D (Net Weight: 7.30 kg – without winch)

TORO D-Range towers — ref. ELECTRIC-D/2

Adapter and drill for ELECTRIC operation of TORO D-Range Lifts. (Net Weight: 7.10 kg)

NOTE: When this electric system is used the TORO D-Range towers have a maximum load capacity of 350 kg.

CUBRECABLES PARA LOS ELEVADORES TORO CABLE COVER FOR **TORO** LIFTERS



Ref. **CBC**

APPLICATIONS

GUIL manufactures a wide range of innovative material lifts, adapters and accessories designed to cover the needs for a large variety of applications:



| HVAC

| GLASS

| AWNINGS & SHELTERS

| ROLLER SHUTTERS & BLINDS

| INSTALLATIONS

| MAINTENANCE WORK

| PIPING & DUCTS

| METALWORK

| CARPENTRY

| EXHIBITION STANDS



CHOOSE A MODEL & LIFT YOUR LOAD



MADE IN SPAIN
www.guil-lifters.com



P.I. La Creu C/ Ismael Tomás Alacreu, 28-30 - CP 46250 L'Alcúdia (Valencia) SPAIN
Fax +34 962540833 Tel +34 962996500 info@guil.es

GUIL - YOUR EUROPEAN LIFTING TOWER MANUFACTURER

